


SAFETY JOINT

Safety Joint

Safety joint is installed on the position required for subsurface drill stem. Safety joint can bear all kinds of loads for pulling or pressing, also be used to transmit torque in fishing operation.

PPGL supplies various safety joints to meet your different needs.

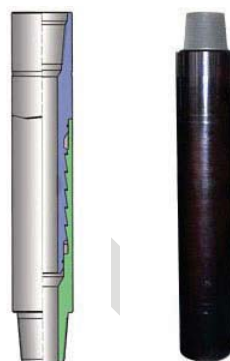

Safety Joint

Technical Specifications of Safety Joint

Model	OD (mm)	ID (mm)	Connection
PPGL-SJ89	89	15	NC26
PPGL-SJ 95	95	20	NC26
PPGL-SJ 105	105	30	NC31
PPGL-SJ 121	121	38	NC38
PPGL-SJ 159	159	50	NC46, NC50
PPGL-SJ 165	165	50	NC46, NC50
PPGL-SJ 178	178	57	NC50, 5-1/2FH
PPGL-SJ 203	203	71.4	6-5/8 REG